


DEGADUR® – Four Steps to Success


Typical coating composition:

- primer
- wearing layer
- seal coat
- coving (optional)

The rapid curing means these layers can be applied without long interruptions or waits. Large projects in particular (up to about 800 m²) can therefore be completed without having to drive to the site several times.

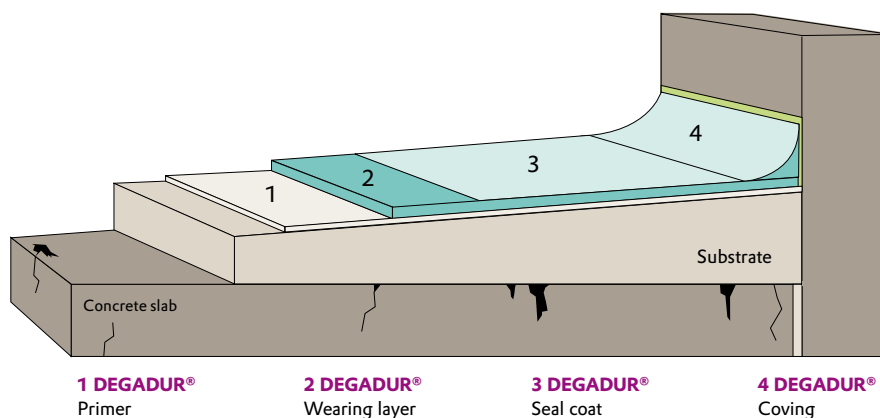

Preparation

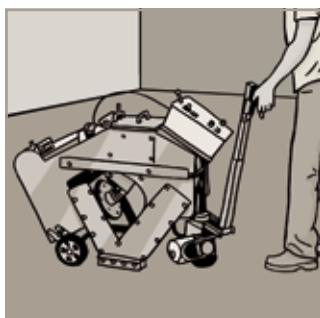

Remove all traces of old coatings.

Priming



Apply primer to the clean, dry substrate using a squeegee and roller.

Wearing layer



Apply the coating in the required layer thickness.

Seal coat



Apply the seal coat using a squeegee and roller.